

## Fender Mount Installation Considerations Superband®, VHF, Radome Antennas

(ALL)-SB-VHF-R

### VERIFY:


1. **Part List:** The system package includes antenna, cable(s), broadcast coupler and connectors if applicable. Use only components supplied with the antenna.
2. **Bandwidth:** VHF Superband® antennas are 24 MHz wide. The antenna is designed to operate between 150 MHz to 174 MHz unless otherwise specified. Be certain that the antenna was tuned to the frequency required.

### INSTALLATION:

Refer to the **Antenna Mounting Instructions** provided for your specific antenna model.

**Note:** Be careful not to tear the sheath of cable when pulling through sharp body panels. If a hole appears in the cable's sheath, cover with several layers of a high quality electrical tape.

1. **Grounding:** Fender-mount antennas must be grounded at the point where the antenna passes through the body of the vehicle. The antenna base must be fastened snugly to the fender. (Be careful not to over-tighten) If required, follow the grounding procedure for installation of the grounding kit. Antennas lacking ground will produce high-reflected power.

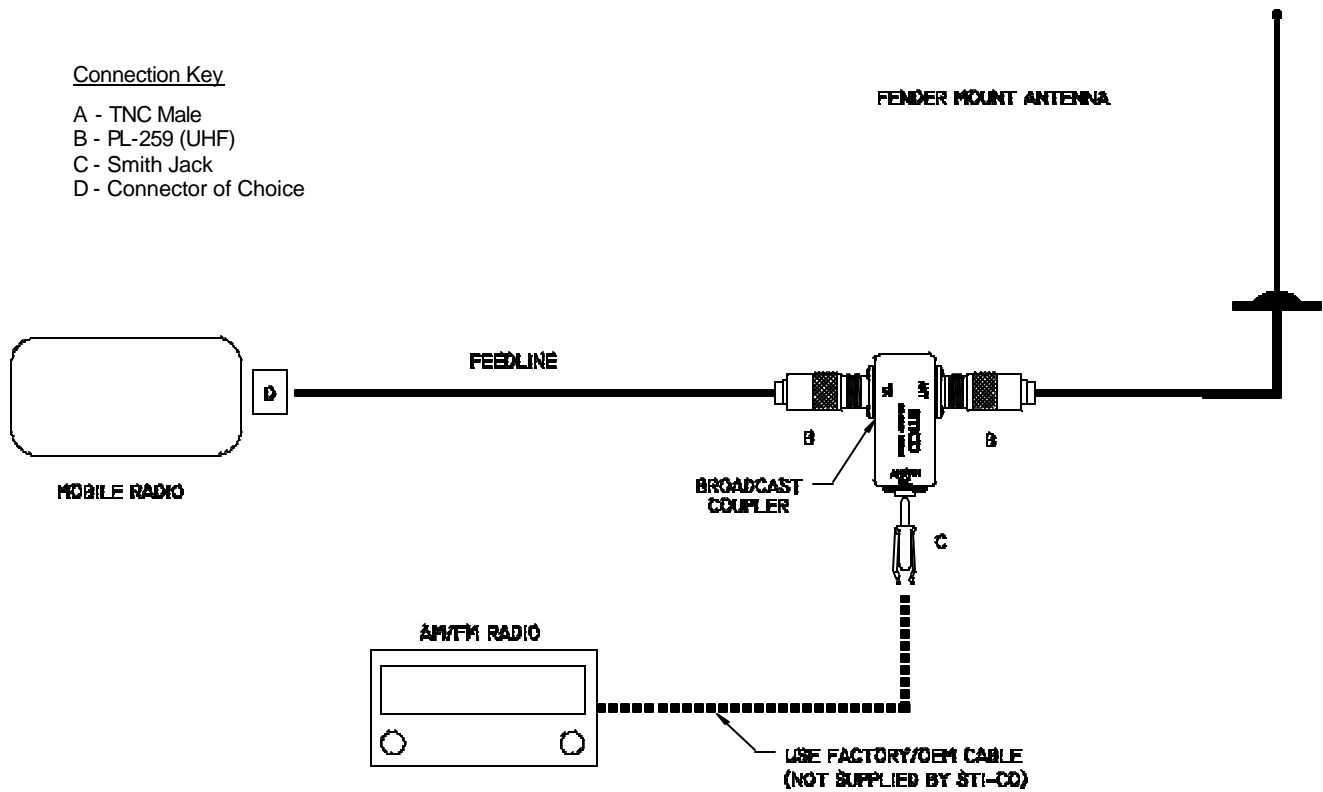


VHF Fender Mount Antennas

- Electromagnetic interference:** Do not coil feedline cable or matching network. If limited space is a concern, fold the cable upon itself rather than coiling.
- Moisture Prevention:** Antennas installed on the front fenders should have a drip bend made with the cable to prevent water running down the cable into the connectors. Bending the section of cable coming from the antenna base/ fender into a "U" shape can make a drip bend. Water will drip off rather than flow into the connectors or coupler boxes.

*Note: Attempts should be made to bring all couplers inside the cabin of the vehicle so they are not exposed to the elements.*

- Cable Cutting:** Cut the feedline cable to the appropriate length required to reach the transmitter. **Do not cut the impedance match cable.**
- Install Connectors:** Refer to the attached cable stripping dimensions (drawing is not to scale). The entertainment radio cable may not have the correct connector to tie into the broadcast port; in that case you must install the Smith jack (supplied) onto that cable.

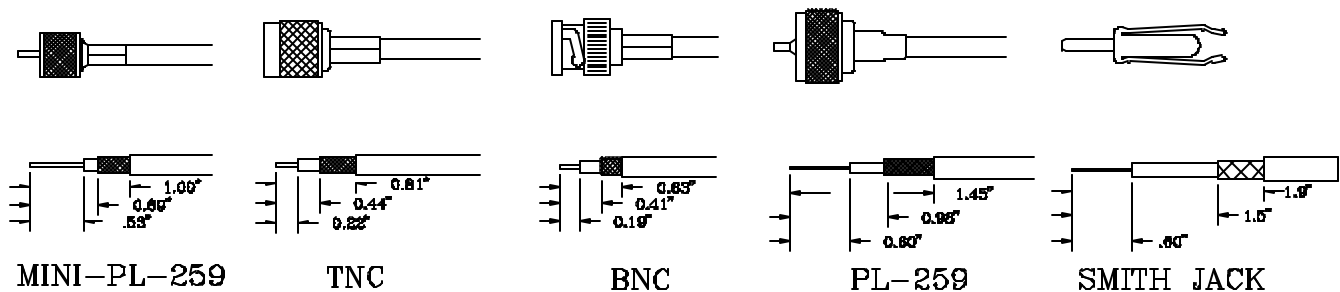

### Cable Stripping Dimensions

#### TESTING:

Installation testing, if required, must take place at the transmitter side of the feedline. This will ensure that the cable connectors and cables have the proper continuity. Make sure all doors, hood, and trunk are closed.

*Note: Some vehicles are sensitive to VHF frequencies. STI-CO suggests that you isolate feedlines and check for unwanted interference with the ignition switch on.*

- Reflective Power:** A measurement of reflective power using a wattmeter, you can expect up to 11% reflected power. When results are greater than 11%, recheck grounding.
- SWR:** A measurement of SWR (standing wave ratio) will yield better than 2:1. If greater than 2:1, recheck grounding.

**CAUTION: The mast must be removed before entering a car wash.**